

Data sheet

3RW44 66-6BC44



SIRIUS SOFT STARTER, VALUES AT 400V, 40DEGREES, STANDARD: 1214A, 710KW, INSIDE DELTA: 2103A, 1200KW, AC 200-460V, AC 230V, SCREW TERMINALS

General technical data:		
product brand name		SIRIUS
• Product equipment Integrated bypass contact system		Yes
• Product feature Thyristors		Yes
Product function		
• Intrinsic device protection		Yes
• motor overload protection		Yes
• Evaluation of thermistor motor protection		Yes
• External reset		Yes
• Adjustable current limitation		Yes
• Inside-delta circuit		Yes
Product component Motor brake output		Yes
Equipment marking acc. to DIN EN 61346-2		Q
Equipment marking acc. to DIN 40719 extended according to IEC 204-2 acc. to IEC 750		G
Power Electronics:		
Operating current		

• at 40 °C rated value	A	1 214
• at 50 °C rated value	A	1 076
• at 60 °C rated value	A	970
Operating current for three-phase motors at inside-delta circuit		
• at 40 °C rated value	A	2 103
• at 50 °C rated value	A	1 864
• at 60 °C rated value	A	1 680
Mechanical power output for three-phase motors		
• at 230 V		
— at standard circuit at 40 °C rated value	W	400 000
— at inside-delta circuit at 40 °C rated value	W	710 000
• at 400 V		
— at standard circuit at 40 °C rated value	W	710 000
— at inside-delta circuit at 40 °C rated value	W	1 200 000
Yielded mechanical performance [hp] for three-phase AC motor at 200/208 V at standard circuit at 50 °C rated value	hp	400
Operating frequency rated value	Hz	50 ... 60
Relative negative tolerance of the operating frequency	%	-10
Relative positive tolerance of the operating frequency	%	10
Operating voltage at standard circuit rated value	V	200 ... 460
Relative negative tolerance of the operating voltage at standard circuit	%	-15
Relative positive tolerance of the operating voltage at standard circuit	%	10
Operating voltage at inside-delta circuit rated value	V	200 ... 460
Relative negative tolerance of the operating voltage at inside-delta circuit	%	-15
Relative positive tolerance of the operating voltage at inside-delta circuit	%	10
Minimum load [% of IM]	%	8
Adjustable motor current for motor overload protection minimum rated value	A	242
Continuous operating current [% of I_e] at 40 °C	%	115
Power loss [W] at operating current at 40 °C during operation typical	W	630
Control electronics:		
Type of voltage of the control supply voltage		AC
Control supply voltage frequency 1 rated value	Hz	50
Control supply voltage frequency 2 rated value	Hz	60
Relative negative tolerance of the control supply voltage frequency	%	-10

Relative positive tolerance of the control supply voltage frequency	%	10
Control supply voltage 1 at AC		
• at 50 Hz rated value	V	230
• at 60 Hz rated value	V	230
Relative negative tolerance of the control supply voltage at AC at 60 Hz	%	-15
Relative positive tolerance of the control supply voltage at AC at 60 Hz	%	10
Display version for fault signal		Display

Mechanical data:

Width	mm	575
Height	mm	780
Depth	mm	292
Mounting type		screw fixing
Mounting position		with vertical mounting surface +/-90° rotatable, with vertical mounting surface +/- 22.5° tiltable to the front and back
Required spacing with side-by-side mounting		
• upwards	mm	100
• at the side	mm	5
• downwards	mm	75
Installation altitude at height above sea level	m	5 000
Wire length maximum	m	500
Number of poles for main current circuit		3

Connections/ Terminals:

Type of electrical connection		
• for main current circuit		busbar connection
• for auxiliary and control current circuit		screw-type terminals
Number of NC contacts for auxiliary contacts		0
Number of NO contacts for auxiliary contacts		3
Number of CO contacts for auxiliary contacts		1
Type of connectable conductor cross-sections for DIN cable lug for main contacts		
• finely stranded		50 ... 240 mm²
• stranded		70 ... 240 mm²
Type of connectable conductor cross-sections for auxiliary contacts		
• solid		2x (0.5 ... 2.5 mm²)
• finely stranded with core end processing		2x (0.5 ... 1.5 mm²)
Type of connectable conductor cross-sections at AWG conductors		
• for main contacts		2/0 ... 500 kcmil

- for auxiliary contacts
- for auxiliary contacts finely stranded with core end processing

2x (20 ... 14)

2x (20 ... 16)

Ambient conditions:

Ambient temperature

- during operation
- during storage

°C

60

°C

-25 ... +80

Derating temperature

°C

40

Protection class IP

IP00

Certificates/ approvals:

General Product Approval

EMC

Declaration of Conformity



CCC



CSA



UL



C-Tick



EG-Konf.

Test Certificates

Shipping Approval

[spezielle Prüfbescheinigungen](#)



ABS



BUREAU VERITAS



DNV



GL



LRS

Shipping Approval

other



PRS

[Umweltbestätigung](#)

[Bestätigungen](#)

UL/CSA ratings:

Yielded mechanical performance [hp] for three-phase AC motor

• at 200/208 V

— at inside-delta circuit at 50 °C rated value

hp

700

• at 220/230 V

— at standard circuit at 50 °C rated value

hp

450

— at inside-delta circuit at 50 °C rated value

hp

850

• at 460/480 V

— at standard circuit at 50 °C rated value

hp

950

— at inside-delta circuit at 50 °C rated value

hp	1 700
Contact rating of auxiliary contacts according to UL	B300 / R300

Further information

Simulation Tool for Soft Starters (STS)

<https://support.industry.siemens.com/cs/ww/en/view/101494917>

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/industrial-controls/catalogs>

Industry Mall (Online ordering system)

<http://www.siemens.com/industrymall>

Cax online generator


<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RW4466-6BC44>


Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3RW4466-6BC44>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RW4466-6BC44&lang=en

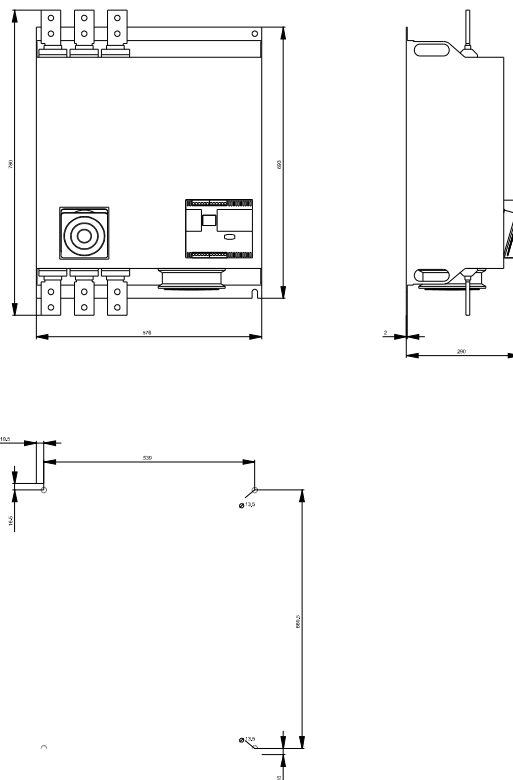

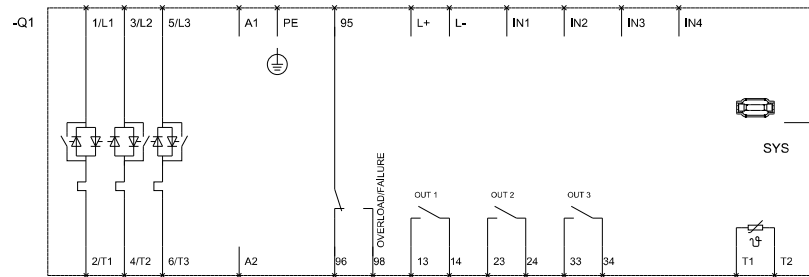

last modified:

12/18/2016